

UNIFOUNT

Fountain Solution Concentrate


Unifount permits a stable ink/water balance to be achieved at lower ink and water settings. Cleaner, sharper and brighter colors result, with no tinting. Formulated to run with integrated dampening systems common on smaller presses. Capable of being used with metal & polyester plate systems.

Unifount contains a balanced pH buffering system which ensures little or no pH drift. Contains materials to guard against mold growth and chemical plate blinding.

- Fast start ups
- Use with polyester(laser & silver image)
- Use with metal
- Controlled water pick-up in ink
- More salable sheets, faster start-up
- Eliminates tinting and ink build-up
- Prevents oxidation spots during stoppages
- Compatible with oil, and rubber based inks

Direction For Use:

Recommended dosage range - 5 oz. to 8 oz. per gallon.
Conductivity per ounce is 100 micromhos.
We recommend starting with 6 oz./gallon.
Once running, adjust dosage up or down as needed.

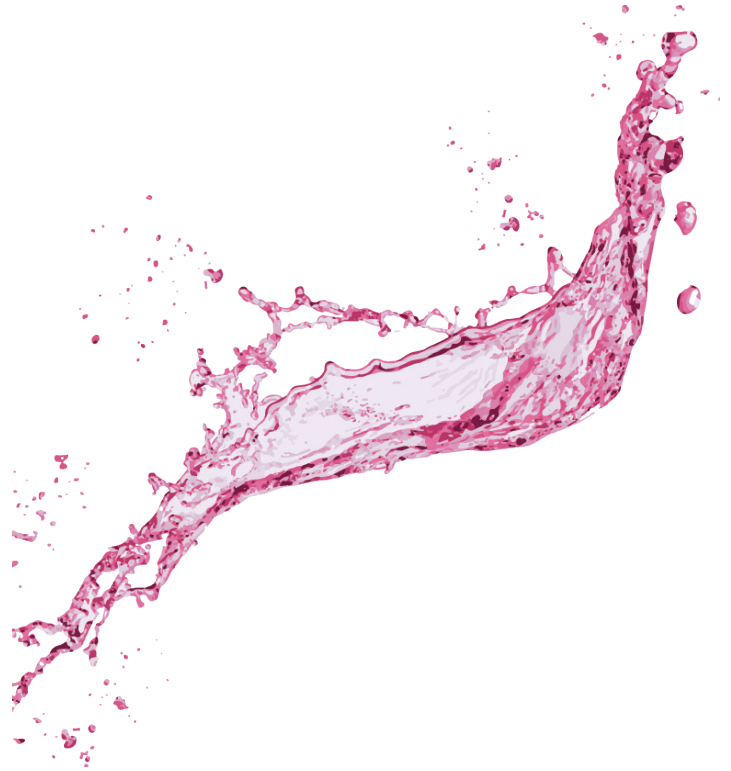

Recommended dosage range 4% to 6.25%.
Conductivity per 1% is 128 micromhos.
We recommend starting with 5%, adjusting dosage up or down as needed.

Specifications:

VOC content lb. / gallon	1.7
VOC content grams / liter	202
Flashpoint	<200°F
Color	Pink
CA. Compliant	Yes

Available In:

Product Code	Unit	Case Qty.
10122D	1 Gallon (3.785 ltr)	4



VOC COMPLIANT Air Quality Management District Compliant

